




2			1						
	REVISIONS								
	REV.	DESCRIPTION	DATE	APPROVED					
					F				

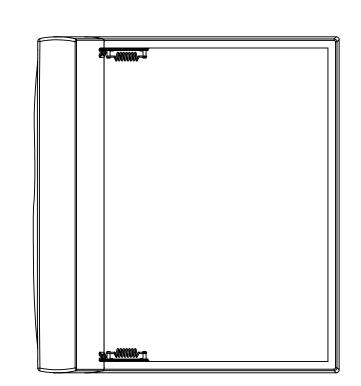


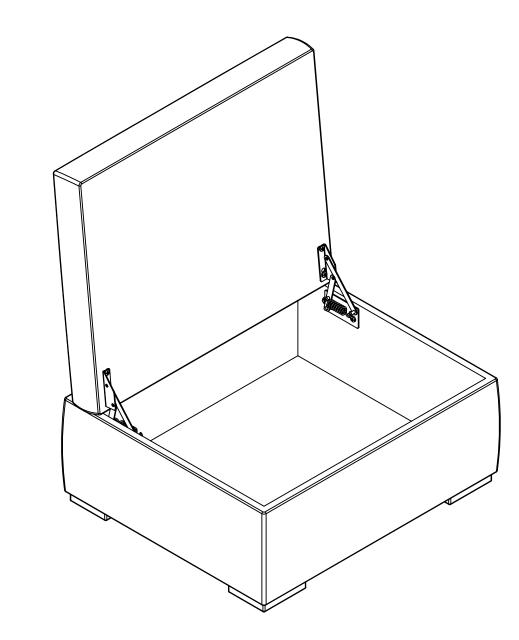


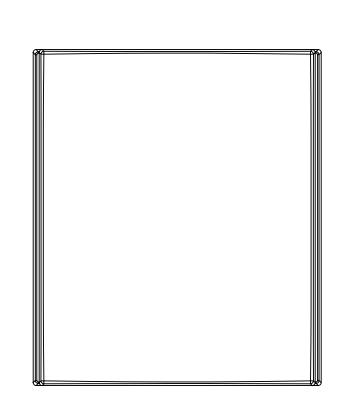


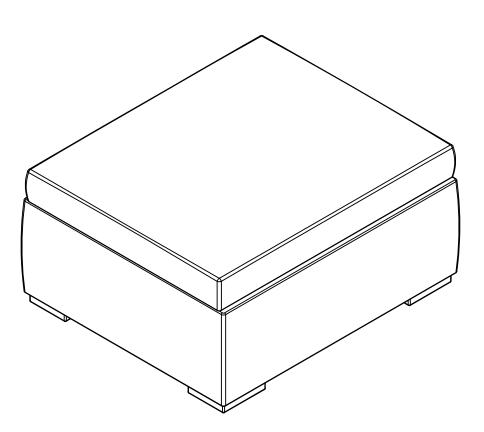

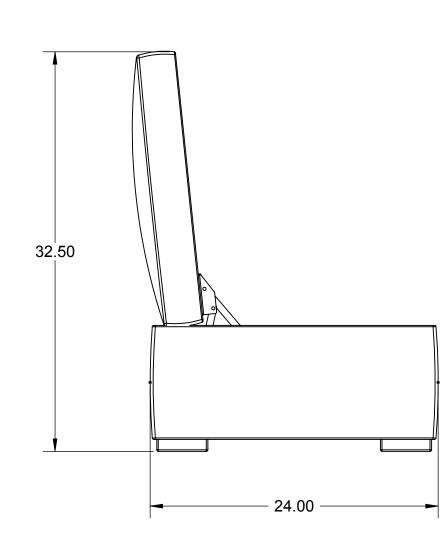

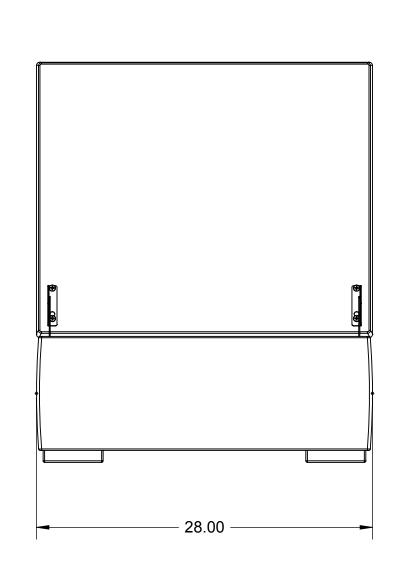

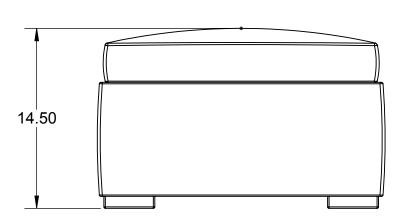

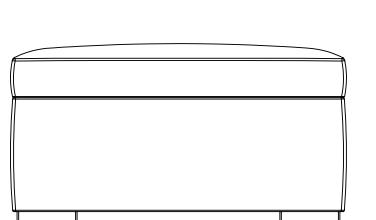

CLOSED

OPEN

STORAGE COMPARTMENT: W = 24.50 L = 20.50 D = 7.25

Applicable Standards/Specifications per: ANSI/ASME Y14.5M-1994

			- ALL THREAD - COUNTERSII - DEBURR HO	THERWISE SPECIFIED: DS TO BE CLASS 2 NK ALL TAPPED HOLES LES AND BREAK SHARP EDGE H, OR MARK DRAWING	s	SALAMANDE D E S I G N	≡R /T/	811 BLUE I BLOOMFIEL 860.313.0525	D, CT 060	002	6 D
			NUMBÉR AND REVISION LETTER ON A NON-CRITICAL SURFACE SURFACE FINISH TO BE 63 RMS - TOLERANCES: .X ± .1		STORAGE OTTOM				OMA	٦N	
					MATERIAL				SURFACE TREATMENT		
-	QTY	NEXT ASSEMBLY	CAD Solidworks	3rd ANGLE PROJECTIO	N DRAWN B	R.F.	-	-30-08	HEAT TREATM		
F	APPLICATION			ENGINEER	ł.	CHECKED BY	,	SCALE 1:8	SHEET	1 OF 1	
4 ½	PROPRIETARY INFORMATION: THIS MATERIAL AND THE CONTENTS THEREOF ARE CONSIDERED THE PROPERTY OF SALAMANDER DESIGNS, AND THE DISCLOSURE TO UNAUTHORIZED INDIVIDUALS OR DISSEMINATION, PUBLICATION, OR COPYING THEREOF IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT BY SALAMANDER DESIGNS OF BI. OOMFIELD. CONNECTICUT.				SCA	DO NOT LE DRAW	/ING	DRAWING NUMBER	/ST/_		REV